



MAXLIFE
INDUSTRIES
INNOVATING THE
BUILDING ENCLOSURE

ArmorSeal™ Mesh Reinforcement

PRODUCT DESCRIPTION

ArmorSeal™ Mesh Reinforcement is a reinforced non-woven polyester fabric. It is used for above-grade as part of three-course applications throughout the project to create strong seams and transitions.

PRODUCT APPLICATION


Apply ArmorSeal coating to panel seams, rough openings, and/or plane transitions at minimum 4 1/2" wet width and immediately embed 4" ArmorSeal Mesh Reinforcement centered on the seam and assuring completely saturated. Allow dry to touch and apply second coat of ArmorSeal coating to fully encapsulate the mesh.

STORAGE AND HANDLING

Protect the mesh reinforcement during transportation and installation to avoid physical damage. Store in a cool and dry place protected from moisture. Apply at temperatures 40°F (4°C) and higher. Refer to the ArmorSeal Reinforcement mesh safety data sheet for more information. Use only as directed.

PACKAGING AND CHARACTERISTICS

Product	Dimensions	Weight
4" ArmorSeal™ Mesh Reinforcement	4" x 180' (101.5mm x 54.8m) roll	2.45 oz/yd ² (83 g/m ²)
6" ArmorSeal™ Mesh Reinforcement	6" x 180' (152.4mm x 54.8m) roll	2.45 oz/yd ² (83 g/m ²)
9" ArmorSeal™ Mesh Reinforcement	9" x 180' (228.5mm x 54.8m) roll	2.45 oz/yd ² (83 g/m ²)

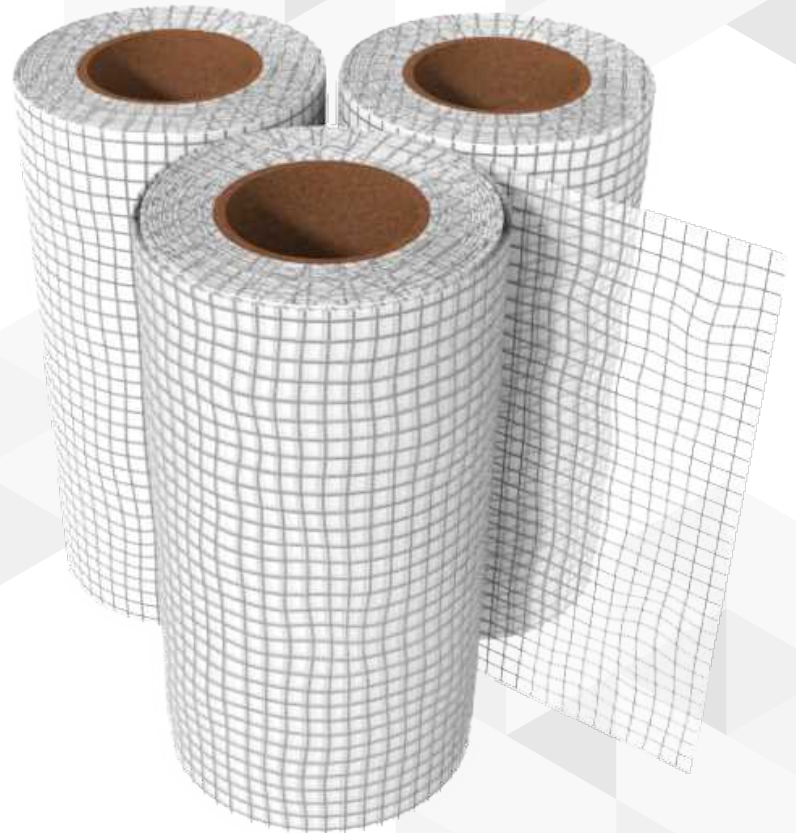

For specific inquiries regarding installation please contact MaxLife Industries Customer Services.

Company Address | 4995 South Main Street, Salisbury, North Carolina 28147
Website Address | www.maxlifeindustries.com
Toll Free Number | 1-844-MAX4YOU (1-844-629-4968)
Customer Service Email | cs@maxlifeindustries.com