



- 1: Metal Stud Frame
- 2: Exterior Sheathing
- 3: Spun Bonded Polyolefin or Liquid Applied Air and Water Resistive Barrier(illustrated)
- 4: ArmorWall PB (R10, R15, and R21 Standard)
- 5: #14-13 Self Tapping Screw
- 6: ArmorWall PB Return Sized for Thickness of Panel, Adhered with (2) Beads of ArmorSeal Sealant
- 7: Modified Mortar with Embedded Fiberglass Mesh Tape at Seams
- 8: Traditional Stucco Brown Coat
- 9: Traditional Stucco Finish Coat
- 10: Door Assembly and Door Flashing By Others
- 11: ArmorWall PB Integrated Drainage Plane (reverse side of panel)

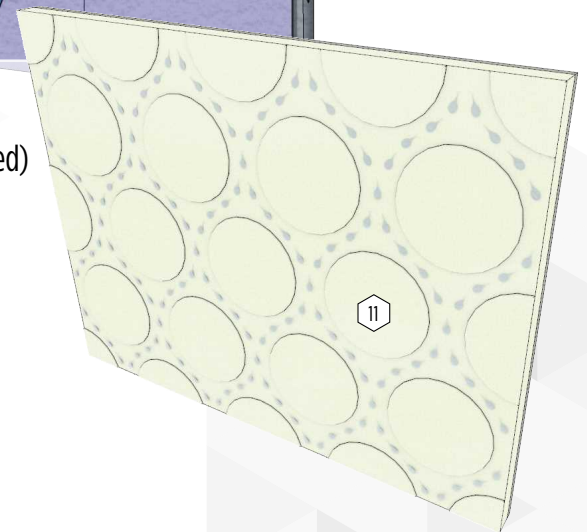

1-844-MAX4YOU  
 (1-844-629-4968)  
[www.maxlifeindustries.com](http://www.maxlifeindustries.com)

Mail To:  
 MaxLife Industries  
 P.O. Box 2128  
 Salisbury, NC 28145

**MAXLIFE**  
 INDUSTRIES  
 INNOVATING THE  
 BUILDING ENCLOSURE

Ship To:  
 4995 South Main Street  
 Salisbury, North Carolina 28147

DETAIL:  
 TRADITIONAL STUCCO TO ARMORWALL PB ON METAL STUD FRAME  
 DOOR PUNCHED OPENING

SCALE:  
 NTS

REVISION:  
 01

NOTES:  
 - THE SURFACE OF ARMORWALL PB MAY ACT AS THE SCRATCH COAT OF THE THREE LAYER STUCCO SYSTEM.  
 - FOLLOW STUCCO SYSTEM MANUFACTURER INSTALLATION GUIDELINES.